UB

Monoblok Sistem

Direct expansion self contained systems
5000 - 32.000 BTU/h




Dijital kontrol, Wi-Fi seçeneği istendiğinde
Digital remote control, Wi-Fi option on request







R410A refrigerant

UB 24H

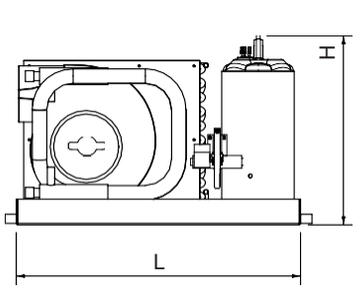



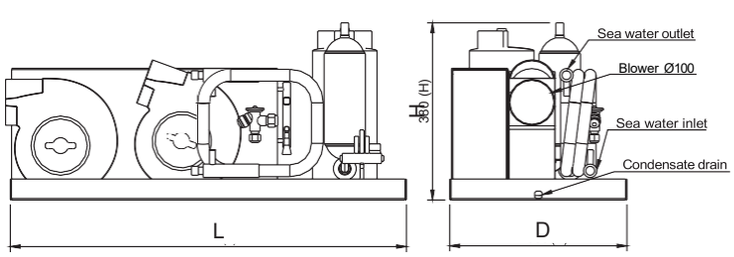

MAREmarin

thermowell


Teknik Özellikler Specifications

Model	UB05H	UB08H	UB10H	UB13H	UB16H	UB18H	UB24H	UB32H
Nominal Soğutma kapasitesi BTU/h - W	5000-1470	8000-2340	10000-2930	13000-3810	16000-4690	18000-5270	24000-7030	32000-9384
*Nominal Isıtma kapasitesi BTU/h - W **	6200-1818	9437-2737	11307-3316	14427-4231	18997-5571	21774-6385	28360-8316	37230-10918
Nominal elektrikli ısıtma kapasitesi - W			6100 – 1800				2x6100-2x1800	
Max Güç girişi kW	0,75	0,92	0,94	1.14	1,6	2.1	2.4	3,1
Tam yüklü akım FLA A/h	3,1	3,2	3,6	5,4	8,3	10,9	12.6	14,9
Güç kaynağı V-Ph-Hz				220-1-50				
Max devre kesici A		10		13	16		20	25
Üfleyici çapı mm			100			2x100		2x120
Deniz suyu bağlantıları mm				19				25
Yoğunlaşma drenaj diamı. mm				16				
Deniz suyu akışı Lt/min - GPM - m3/h		8 - 2,5-0,48		15 - 4 -0.9		22 - 5,8-1,4		30 - 8-1,8
Soğutucu gazı şarj gr (410A)	260	27(		350	400	630	650	700
Net ağırlık kg	19	19	22	24	33	39	45	50
Ölçüler LxDxH mm	430x240x295		430x240x315	430x300x340	510x330x360	770x380x400	770x380x410	

Güç ve elektrik verileri, soğutma modunda 7,2°C buharlaşma sıcaklığı ve 37,8°C yoğuşma ile ısıtma modunda 7,2°C buharlaşma sıcaklığı ve 54,4°C yoğuşma sıcaklığı ile ilişkilidir.
*Döngü tersine çevirmeli ısı pompası ünitesi.
**Elektrik direncine sahip birim. İstek üzerine farklı besleme voltajları mevcuttur. Tüm boyutlar +/- 10 mm. Tüm ağırlıklar +/- %10.

BTU and electrical data are based on 45F / 7,2°C evaporating temperature and 100F/37,8°C condensing temperature in cooling mode, and 45F /7,2°C evaporating temperature and 130F / 54,4°C condensing temperature in heating mode.
*Heat pump version with reversing cycle.
**Units equipped with electric heater.
Different voltages available upon request. All dimensions +/- 0,39 in. All weights +/-10%.

Kurulum diyagramı Installation scheme

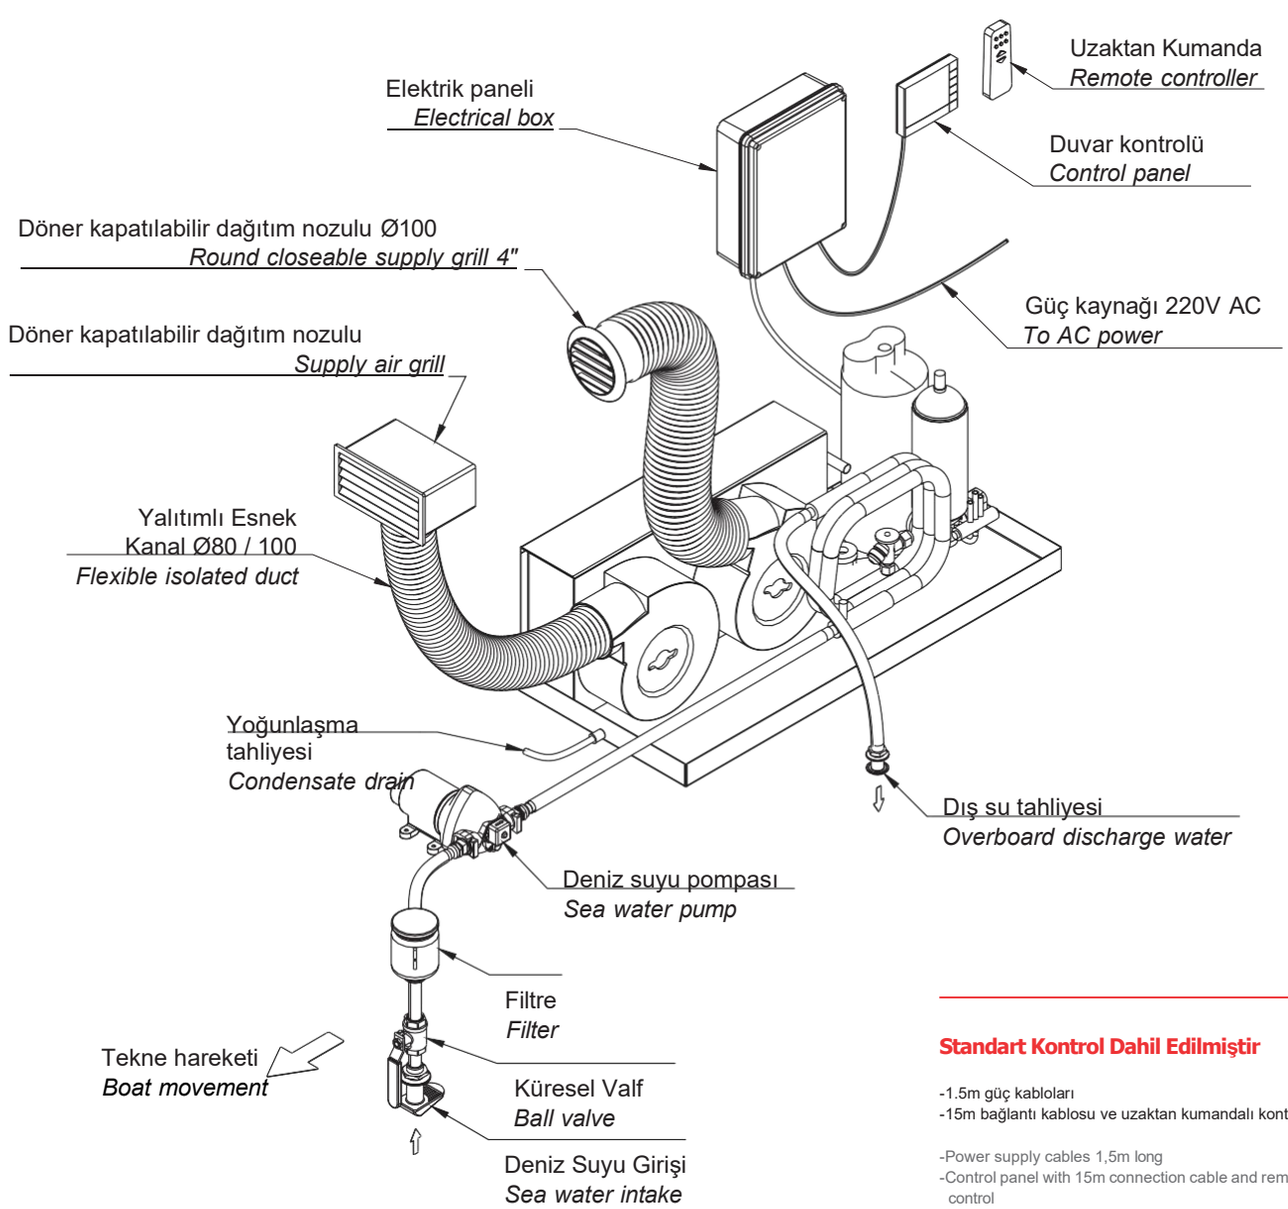

Standart Kontrol Dahil Edilmiştir

-1.5m güç kabloları
-15m bağlantı kablosu ve uzaktan kumandalı kontrol paneli

-Power supply cables 1,5m long
-Control panel with 15m connection cable and remote control

thermowell

MAREmarin